



Overview

Engineered for peak performance and easy installation, the 0.72W LED Module is distinguished by its remarkable energy efficiency, seamlessly blending brightness with minimal power consumption.

Its high-transmittance lens ensures a wide 170° beam angle, delivering expansive coverage for diverse projects. With an IP67 rating, the 0.72W LED Module ensures unwavering energy efficient operation.



Explore LED Modules




Where to Buy

Features


- High efficiency - 165lm/w
- 170° wide beam angle
- IP67 rated
- Long life span
- Environmental friendly

Dimensions

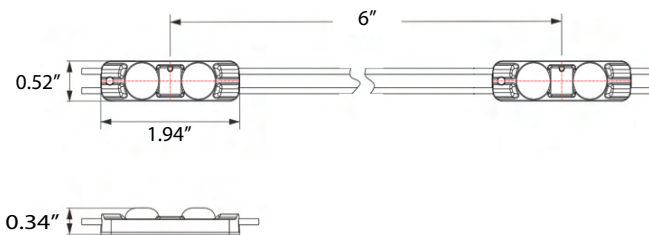

Specifications

Part Number (12V/24V).....	L307W2TW12B/L307W2TW24B
Color/Color Temperature*...	7000K
LED/Module.....	2
Module/Foot.....	2
Lumens/Module.....	118.8
Lumens/Foot.....	237.6
Lumens/Watt.....	165
Beam Angle.....	170°
Power Consumption (W).....	0.72W
Input Voltage.....	12V/24V
Operating Temperature.....	-40°C ~ 60°C
Ingress Protection Rating...	IP67
Recommended Depth.....	2"~9.8" (6cm~25cm)
Warranty.....	5 years
Packaging.....	40 modules (12V) 80 modules (24V)/bag
Light Distribution Curve.....	

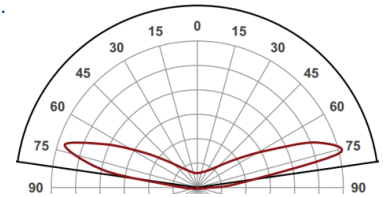

Power Supplies Loading

	Power Supply Part number	Output Watts	Input Voltage	Output Volts DC	Max. # Modules***
12V	ACVN125-120-277V	60W	120-277	12	83
	ACV125-120-277V	60W	120-277	12	83
	ACV2125-120-277V	120W (60 + 60)	120-277	12	83 + 83
	ACV3125-120-277V	180W (60 + 60 + 60)	120-277	12	83 + 83 + 83
	CVW125-120-277V**	60W	120-277	12	83
	CVW2125-120-277V**	120W (60 + 60)	120-277	12	83 + 83
	CVW3125-120-277V**	180W (60 + 60 + 60)	120-277	12	83 + 83 + 83
24V	CV244-120-277	96W	120-277	24	133
	CVW244-120-277**	96W	120-277	24	133
	CVW2244-120-277**	192W (96 + 96)	120-277	24	133+133
	CVW3244-120-277**	288W (96 + 96 + 96)	120-277	24	133+133+133

*Custom colors available upon request - minimum order quantity required

**IP68 rated

***Based on 100% load (recommended 80%). Maximum 40 (12V) / 80 (24V) modules per series.

