

ELECTRONIC IGNITORS

2260 / 2265

SPECIFICATION GUIDE


SINGLE POLE, ONE END GROUNDED MODELS

DESCRIPTION:

Allanson's Electronic Ignitors have proven to be durable, effective ignition components that delivers dependable power whether your application calls for 120 Volts or 230 Volts. The 2260/2265 series are versatile, light-weight and compact to meet your needs. With four different types to choose from, installation on any application will be quick and effortless. These energy efficient ignitors are designed for constant duty, drawing only ½ an amp and have full wave output.

FEATURES:

- Easy conversion with mounting tabs and primary wire connector
- · No clumsy connections
- Extended life expectancy and energy efficient
- Meet requirements for EMI/RFI conditions
- Quick and easy to install
- Optional secondary connector kit

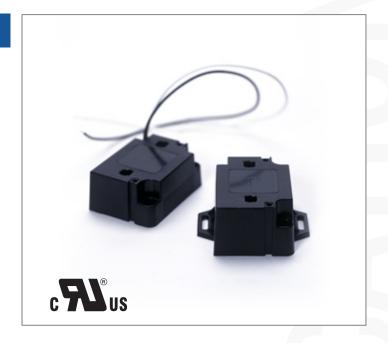

Input Supply Frequency (Hz): 50/60
Secondary Frequency (kHz): >20
Storage Temperature (degrees °C): -40 to +80
Operating Temperature (degrees °C): -30 to +40
Operating Relative Humidity (%): 90
Loading Air Gap (inches): 1/16 - 3/16
Recommended High Voltage Cable Length: * up to 6'

TECHNICAL SPECIFICATION:

120 VOLTS

| MODEL | DESCRIPTION | Pri A | Sec KVpk | mA | VA | LENGTH | DEPTH | HEIGHT | Wt |
|----------|---|----------|-------------|----|----|--------|-------|--------|--------|
| 2260-TP | Mtg tabs / primary plug set with pig tails | 0.5 | 15.6 | 28 | 72 | 3.6 | 2.5 | 1.5 | 3/4 lb |
| 2260-TW | Mtg tabs / traditional bottom exit pig tails | | | | | 3.6 | 2.6 | 1.8 | |
| 2260-P | Primary wire plug with pig tails set only | | | | | 3.6 | 2.5 | 1.5 | |
| 2260-TWG | Mtg tabs / traditional bottom exit pig tails, 18" H.V. Lead | | | | | 3.6 | 2.6 | 1.8 | |

230 VOLTS

| MODEL | DESCRIPTION | Pri A | Sec KVpk | mA | VA | LENGTH | DEPTH | HEIGHT | Wt |
|----------|---|----------|-------------|----|----|--------|-------|--------|--------|
| 2265-TP | Mtg tabs / primary plug set with pig tails | 0.5 | 15.6 | 30 | 72 | 3.6 | 2.5 | 1.5 | 3/4 lb |
| 2265-TW | Mtg tabs / traditional bottom exit pig tails | | | | | 3.6 | 2.6 | 1.8 | |
| 2265-P | Primary wire plug with pig tails set only | | | | | 3.6 | 2.5 | 1.5 | |
| 2265-TWG | Mtg tabs / traditional bottom exit pig tails, 18" H.V. Lead | | | | | 3.6 | 2.6 | 1.8 | |





^{*} Max length may vary depending on installation or application



ELECTRONIC IGNITORS

2260 / 2265

SPECIFICATION GUIDE

MECHANICAL SPECIFICATION:

| MODEL | SIDE VIEW | TOP VIEW |
|----------------------|----------------------------------|----------------------------------|
| 2260-TP 2265-TP | 1.50" | 3.59" |
| 2260-TW 2265-TW | 1.75" | 3.70" 1.17" 2.56" 3.20" |
| 2260-TWG 2265-TWG | 1.75" 2 Primary Leads HV Cable | 0.57" 0.18" |
| 2260-P 2265-P | 1.50" 5° | 3.59" 1.17" 2.56" 1.86" |



