

Overview

Allanson's Shell SkyBar LED Rigid Border Tubing provides top of the line LED systems that complement and enhance the appearance of your building. Tailored for excellence, its uncompromising durability fully complies with specified light emissions, color calibration, now loads, and power supply.

Approved by Shell's Corporate Head Office (Netherlands), cULus certified for North America, offering peace of mind for quality and safety.



Installation Manual



Installation Manual (FR)



Where to Buy

Features


- No-on site cutting required, saving labor costs and valuable time
- IP66 rated rigid polycarbonate construction, reinforced with stainless steel clips, standing strong in extreme weather.
- IP68 connection cables ensure uninterrupted performance
- UV resistant housing prevents discoloration and cracking, maintaining a pristine appearance.
- Proven technology for a decade (Skyline family) ensures long-lasting reliability.
- Radius corners available for added versatility.

Specifications

| | |
|----------------------------|--|
| Operating Temperature..... | -40°C ~ 70°C |
| Protection Class..... | IP66 outdoor rated |
| Voltage..... | DC 24V |
| Colors..... | Shell Red Yellow |
| Power Consumption..... | 1.4W/ft |
| Part Number..... | ARBT-XXXRY (XXX denotes length) |
| Total Length (in)..... | 106.75" or 53.45" or 28" (90° 160mm r) |
| Warranty..... | 5 Years |

Dimensions


TOP VIEW

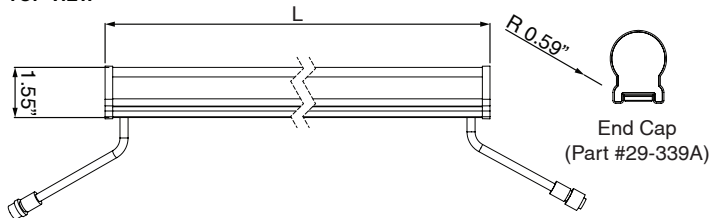


BOTTOM VIEW



Available Accessories



Clip
(Part #27-613)

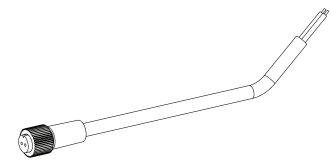

IP68 Female Connector (with pigtail)
(Part #27-525C)

Power Supplies Loading

| | Power Supply Part number | Output Watts | Input Voltage | Output Volts DC | Max. Capacity |
|-----|--------------------------|---------------------|---------------|-----------------|---|
| 24V | CVW244-120-277* | 96W | 120-277 | 24 | 68' (20.7m) |
| | CVW2244-120-277* | 192W (96 + 96) | 120-277 | 24 | 68' (20.7m) + 68' (20.7m) |
| | CVW3244-120-277* | 288W (96 + 96 + 96) | 120-277 | 24 | 68' (20.7m) + 68' (20.7m) + 68' (20.7m) |

*IP68 rated

