

### UVB264T6-2100-MV-PCB


Lamp Type /Catalog #	Manufacturer	Power (W)	Current (A)	
Amalgam	NNI 300/147XL	Heraeus Noblelight	325	2.1
	TUV 325W XPT	Philips	280	2.1
	GIA1564T6LCA/2S13	First Light	260	2
	GPHHVA1554T6L/4	Light Sources	320	2.1

### Ballast Specifications

<b>Ballast type:</b>	Program Start (PS)	<b>Operating frequency:</b>	> 25kHz
<b>Number of lamps:</b>	2	<b>Lamp current crest factor:</b>	1.7 or less
<b>Normal input voltage:</b>	208-347V, +/-10%, 50/60 Hz	<b>Efficiency:</b>	> 90%
<b>Input current:</b>	3.15A(208V)/1.92A(347V)	<b>Protection:</b>	EOL/OC
<b>Input power:</b>	650W @ full load	<b>Low inrush current:</b>	8A
<b>Power factor:</b>	> 95%	<b>Sound rating:</b>	"A"
<b>Approvals:</b>	UL/cUL Recognized, Class "P", Indoor, Type 1	<b>Weight:</b>	3.2 lbs

### Wiring Diagram and Dimensions

Dimensions: 9.25" (L) x 7.0" (W) x 2.75" (H)

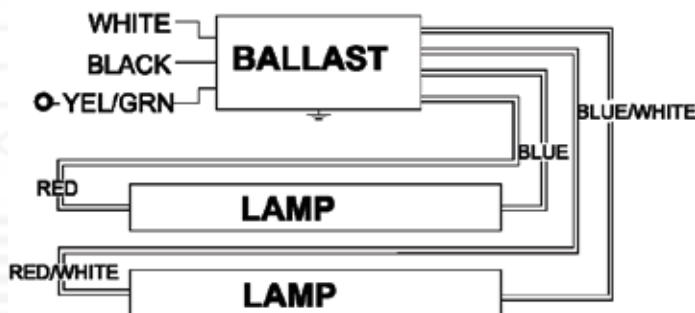

**Allanson**  
LIGHTING TECHNOLOGIES

