

Specifications Sheet

UV Ballasts

UVB30W-425-24VDC

1. Lamp Type

Lamp Type / Cata #	Manufacture	# of Lamps	Power (W)	Current (mA)
GPH162T5L/4P	Light Source	2	7	425
GPH254T5L/4P	Light Source	1	14	425
GPH436T5L/4P	Light Source	1	21	425

2. Electrical

Ballast type:	Program Start (PS)
Number of lamps:	1 - 2
Normal input voltage:	24VDC, +/- 10%
Input current:	1.4A
Input power:	30W @ full load
Lamp operating frequency:	> 35 kHz
Efficiency:	> 90%
Ballast shut down/protection:	EOL/OC
Ambient temperature:	0 - 40° C
Case maximum temperature:	75° C
Approvals:	UL/cUL Listed, Class "P"
Sound rating:	"A"

3. Wiring Diagram

2 Lamp Operation




1 Lamp Operation

Insulate each yellow lead individually



4. Mechanical Data

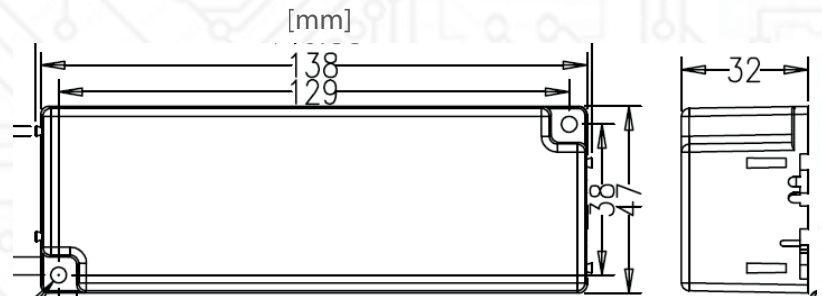

Allanson
LIGHTING TECHNOLOGIES